

SST-60



The SST-60 is a high powered multi-use LED bulkhead. Ideal for heavy duty industrial applications.

OVERVIEW

SPECIAL FEATURES

Compliance:

- Safety: AS/NZS 60598 series
- EMC: AS CISPR15
- Vibration test: IEC 60068-2-6

APPLICATIONS

Demanding environments including:

- Conveyors
- Walkways
- Stairwells
- Tunnels
- Warehousing
- Gantry
- Load-out station
- Beneficiation Plant
- CHPP

SPECIFICATIONS & MEASUREMENTS


SPECIFICATIONS

LUMINOUS FLUX (LM)	5,700lm
EFFICACY	Up to 95lm/W
ELECTRICAL	220 - 240 Vac 50Hz
POWER FACTOR	>0.90 @ 230 Vac
LED SERVICE LIFE	50,000 hrs (L80 B10)
CCT	4000K
CRI	>70
DISTRIBUTION	Symmetrical
BODY	LM6 Die cast aluminium alloy (low copper content)
LENS	Flat tempered glass (frosted)
OPERATION TEMPERATURE	-20°C - +55°C
DIMMABLE	Optional
CABLE ENTRY	m20 gland (max ø12mm cable)
SPD	20kV Uoc, 25 kA Imax
MOUNTING	Wall, ceiling or pole (with mounting plate by others)
IP RATING	IP66
CLASS	Class I
IK RATING	IK08

MEASUREMENTS & WEIGHTS

WEIGHT 6.1 kgs Max

WATTAGE 60W

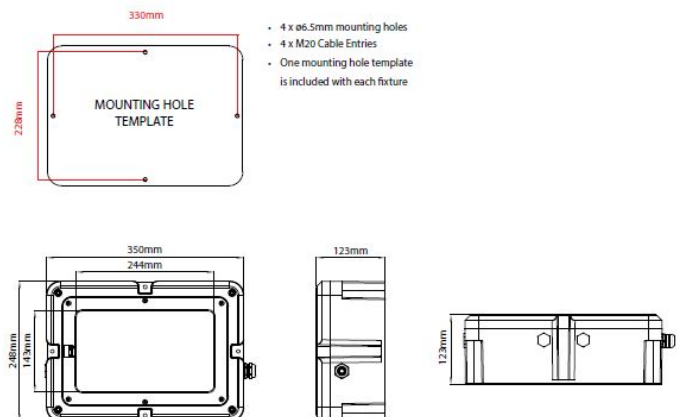


PRODUCT RANGE

PHOTOMETRIC DATA

CODE	DESCRIPTION	LUMENS	LED	DISTRIBUTION
187000	SST-60 LED Bulkhead	5,700lm	60W	Symmetrical

Pictorial is representative only. Specifications may change without notice.

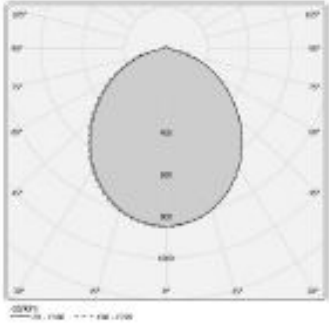

SST 60W

